



FAMACRIL C 24

* The information, descriptions, designs and suggestions provided by LXBD, verbally or written, are exclusively given for your guidance only, owing to many factors out of LXBD control, which are susceptible to affect the process, applications or product uses; it must be necessary executing by the user the necessary tests to establish the suitability of the products for particular purpose prior to be used. LXBD suggestions don't exclude the user obligation to check the technical data sheets and safety data sheets, just as our informative brochures. No warranties of any kind, either implied or explicit, including the implied warranties of marketability, capacity for a particular purpose may be considered like a license concession to infringing rights derived of current patents. In any case the descriptions, data and designs shown here, should not be understood as elements of our terms and sale conditions. The user agrees and expresses to know that neither of the descriptions and data given by LXBD can be considered as assumption of obligation and/or responsibility of this society, with regard the results obtaining as particular uses of product; results that are accepted by the user under his own responsibility.

March 25



HUMAN TEAM



SUSTAINABLE
DEVELOPMENT



COMPANY VALUE



ENVIRONMENTAL
RESPONSABILITY



INNOVATIVE



SEALANT MORTAR

FAMACRIL C 24



FAMACRIL C 24

COATINGS WITH EXCELLENT
WATERPROOF AND FLEXIBILITY



FAMACRIL C 24

SEALANT MORTAR

For years, LXBD has provided the construction industry with innovative solutions to ensure the quality and durability of building materials. In line with this commitment, LXBD has developed FAMACRIL C 24, a styrene-acrylic emulsion compatible with hydraulic binders, designed for the formulation of various waterproof and flexible mortars.




MAIN PROPERTIES

- Excellent cement compatibility for seamless integration.
- Minimal water absorption to enhance durability.
- Optimal elasticity-to-tensile strength ratio for superior performance.
- Strong adhesion for reliable bonding.
- High flexibility, even in low-temperature conditions.



FAMACRIL C 24 complies with multiple European regulations for materials in contact with potable water, including:

- Spanish Royal Decree 140/2003.
- Italian Ministerial Decree No. 174 (April 6, 2004).
- EU Directive 2002/72/EC.
- German BfR Recommendation XIV (Plastics Dispersions) by the Federal Institute for Risk Assessment.

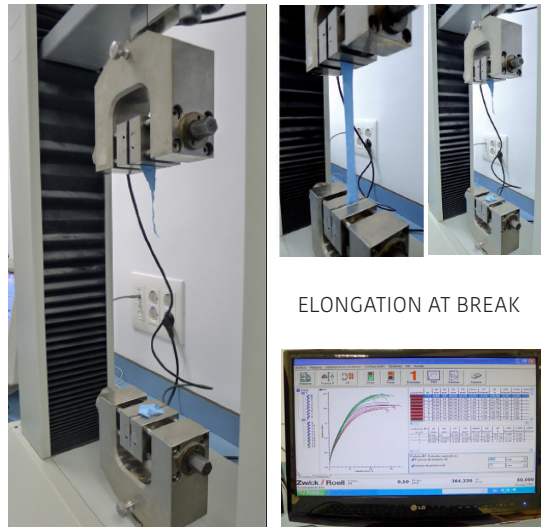

ELONGATION AT BREAK

Total Solids Content (%):	58 ± 1 %
Brookfield Viscosity RVT 23°C (2/20 rpm, mPa•s):	500 - 1.200
pH:	7,5 - 9,5
Minium film forming temperature (°C):	0
Tg:	-15
Emulsifying system	Anionic-no ionic
Mechanical stability	Excellent

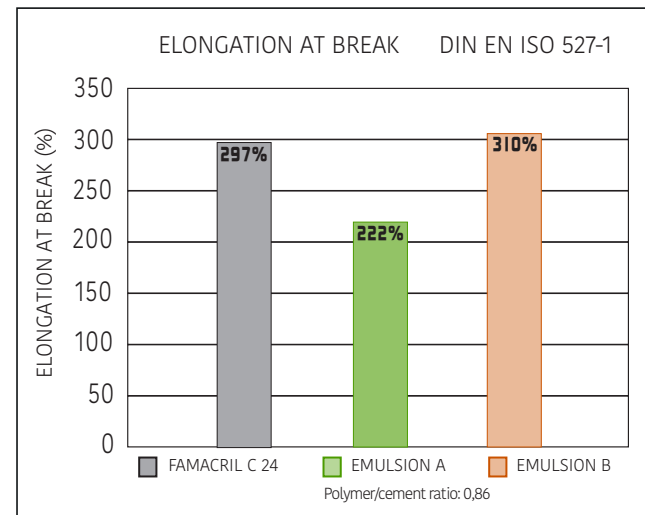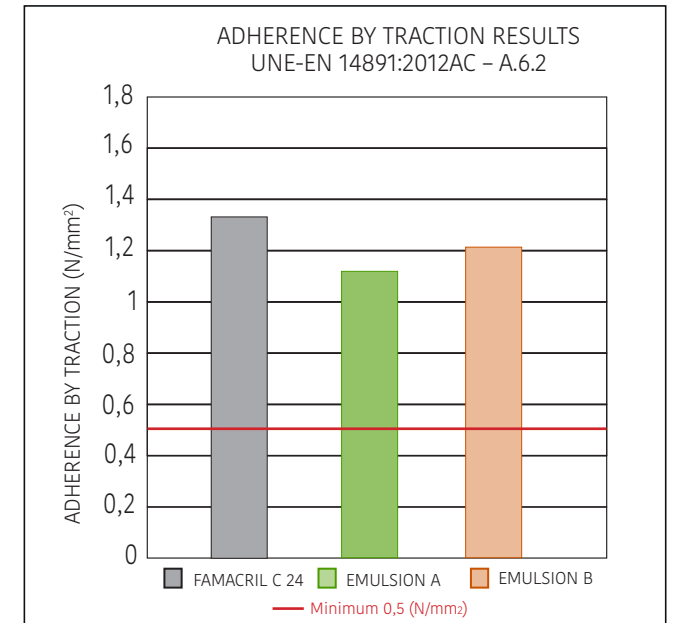

APPLICATIONS



- FLEXIBLE MEMBRANES FOR ROOFS AND TERRACES.
- WATERPROOF CEMENT COATINGS FOR TANKS AND WATERWAYS.
- WATERPROOF MORTARS FOR SWIMMING POOLS, BASEMENTS, AND OTHER WET AREAS.
- DURABLE COATINGS FOR TUNNELS AND PASSAGES.

CHARACTERISTICS

- Enhanced workability and fluidity for easy application.
- Superior watertightness against hydrostatic pressure.
- Strong adhesion to concrete surfaces.
- High elongation capacity for flexibility and crack resistance.
- Low water absorption to improve durability.
- Excellent resistance to atmospheric agents and harsh conditions.
- Water vapor permeability for breathability and moisture control.
- Effective corrosion protection for long-term material integrity.

RESPECT FOR THE ENVIRONMENT

- Solvent-free for environmentally friendly applications.
- Ammonia-free to reduce emissions and odors.
- APEO-free for improved environmental safety.
- Formaldehyde-free to meet health and safety standards.
- Coalescent-free formulation, ensuring low VOC content.



www.lxbd.de